

VILLAINEX



Villain EX Owner's Manual

**Model
1502**

14.4v

TRAXXAS

Introduction

- 3 Before You Proceed
- 4 Safety Precautions
- 5 Tools, Supplies and Required Equipment
- 6 Anatomy of the Villain EX
- 7 Quick Start: Getting Up to Speed
- 8 Detailing Your Villain EX
- 9 The Traxxas TQ Radio System
- 19 Driving the Villain EX
- 20 Adjusting Your Villain EX
- 21 Maintaining and Storing Your Villain EX
- 22 Increasing Performance
- 23 Index

The Traxxas Villain boat series has set the standard for reliable, high-performance RC boating. The Villain EX has raised the bar even further with faster top speed, sealed radio box, and stunning graphics. The Villain EX is powered by twin motors and a water-cooled electronic speed control. The dual, steerable outrdrive units utilize surface-piercing, counter-rotating propellers for efficient performance. The trim angle on the outrdrives is adjustable to tune how the boat performs on the water. The deep-V hull design and low center of gravity allow the Villain EX to have superior stability in all kinds of water conditions.

Please keep in mind that this boat is not a toy, and is not intended to be used by children without responsible adult supervision. This is due to the inherent dangers that are always associated with any body of water. Please respect the water and use extreme caution when launching and retrieving boats.

We're confident that you will enjoy the power, speed, and reliability that the Villain EX has to offer.

Traxxas Headquarters
1100 Klein Road
Plano, Texas 75074
Phone: 972-265-8000
Toll-free: 1-888-TRAXXAS

Traxxas U.K.
P.O. Box 1128, Winterbourne,
Bristol BS17-2SH, England
Phone: 44-117-956-1002

Internet: www.Traxxas.com • www.ReadyToRun.org

E-mail: support@Traxxas.com

Entire contents ©2003 Traxxas Corporation. Other brand names and marks are the property of their respective holders and are used only for purposes of identification. No part of this manual may be reproduced or distributed in print or electronic media without the express written permission of Traxxas.

030718



Before You Proceed

Carefully read and follow all instructions in this and any accompanying materials to prevent serious damage to your Villain EX boat. Failure to follow these instructions will be considered abuse and/or neglect.

Before running your Villain EX, look over this entire manual, and examine the boat carefully. If for some reason you decide the Villain EX is not what you wanted, then do not continue any further. **Your hobby dealer absolutely cannot accept a Villain EX for return or exchange after it has been run.**

Warnings, helpful hints, and cross-references

Throughout this manual, you'll notice warnings and helpful hints, identified by the icons below. Be sure to read them!



An important warning about personal safety or avoiding damage to your Villain EX and related components.



Special advice from Traxxas to make things easier and more fun.



Refers you to a page with a related topic.

Support

If you have any questions about your Villain EX or its operation, call the Traxxas Technical Support line toll-free at: 1-888-TRAXXAS (1-888-872-9927)

Technical support is available Monday through Friday from 8:30am to 9:00pm central time. Technical assistance is also available at www.Traxxas.com. You may also e-mail customer support with your question at support@Traxxas.com. Join thousands of Traxxas R/C enthusiasts in our online community at www.ReadyToRun.org

Traxxas offers a full-service, on-site repair facility to handle any of your Traxxas service needs. Maintenance and replacement parts may be purchased directly from Traxxas over the phone, through our website at www.BuyTraxxas.com, or you can save shipping and handling costs by purchasing them from your local hobby dealer.

Safety Precautions



All instructions and precautions outlined in this manual should be strictly followed to ensure safe operation of your model.



The Villain EX is not intended for use by those under 16 years of age without the supervision of a responsible and knowledgeable adult.

All of us at Traxxas want you to safely enjoy your new Villain EX. Operate your Villain EX sensibly and with care, and it will be exciting, safe, and fun for you and those around you. Failure to operate your Villain EX in a safe and responsible manner may result in property damage and serious injury. The precautions outlined in this manual should be strictly followed to help ensure safe operation. You alone must see that the instructions are followed and the precautions are adhered to.

Important Points to Remember

- ▶ Do not drive the Villain EX at night.
- ▶ Never, under any circumstances, operate the Villain EX in any water where people are swimming or wading. The Villain EX is fast and could cause injury if allowed to collide with anyone, avoid running in areas reserved for water fowl!
- ▶ Because the Villain EX is controlled by radio, it is subject to radio interference from many sources that are beyond your control. Since radio interference can cause momentary loss of radio control, always allow a safety margin in all directions around the boat in order to prevent collisions.
- ▶ Do not reach underneath the rear of the Villain EX. The propellers could spin unexpectedly. Always pick up the boat from the front or the side.
- ▶ Because of the many dangers involved with any body of water, Traxxas recommends that you **never try to wade or swim to retrieve the boat**. Another section in this manual outlines safer, alternative methods for boat retrieval.

- ▶ Due to the high-performance nature of the electric motors, they can become **extremely hot** during use. Do not touch the motors when installing and removing battery packs.
- ▶ **Most importantly, use good, common sense** when you are around the water to avoid mishaps such as slipping on a muddy bank. Always observe water safety rules and regulations.

Where to Run

Select a body of fresh water which is calm and free of debris, tree stumps, moss, etc. Also, find a clean, stable area of shoreline to launch from. The water must be at least 10-inches deep. Be aware that some ponds restrict the use of model boats. Always choose a launch site which is downwind so that the wind and waves will drift the boat back to you if it should ever become disabled or capsize. **Running the Villain EX in salt water is not recommended. Damage from corrosion is not covered by the warranty. The Villain EX is too fast to run in a swimming pool.**

Tools, Supplies, and Required Equipment

Your Villain EX comes with a set of specialty tools. You'll need to purchase other items, available from your hobby dealer, to operate and maintain your model.

Required Tools and Supplies



#2 Phillips screwdriver



#1 Phillips screwdriver



Small flat-blade screwdriver (1/8 inch blade)



Hobby knife



Needlenose pliers

Batteries



8 AA alkaline batteries for the transmitter



Two 7.2-volt NiCad battery packs



NiCad battery charger




For more info on batteries, see *Use the Right Batteries* on page 11.



A peak-detecting charger is recommended for best performance and longest battery life. For more information, see *Charging the Batteries* on page 11.

Anatomy of the Villain EX

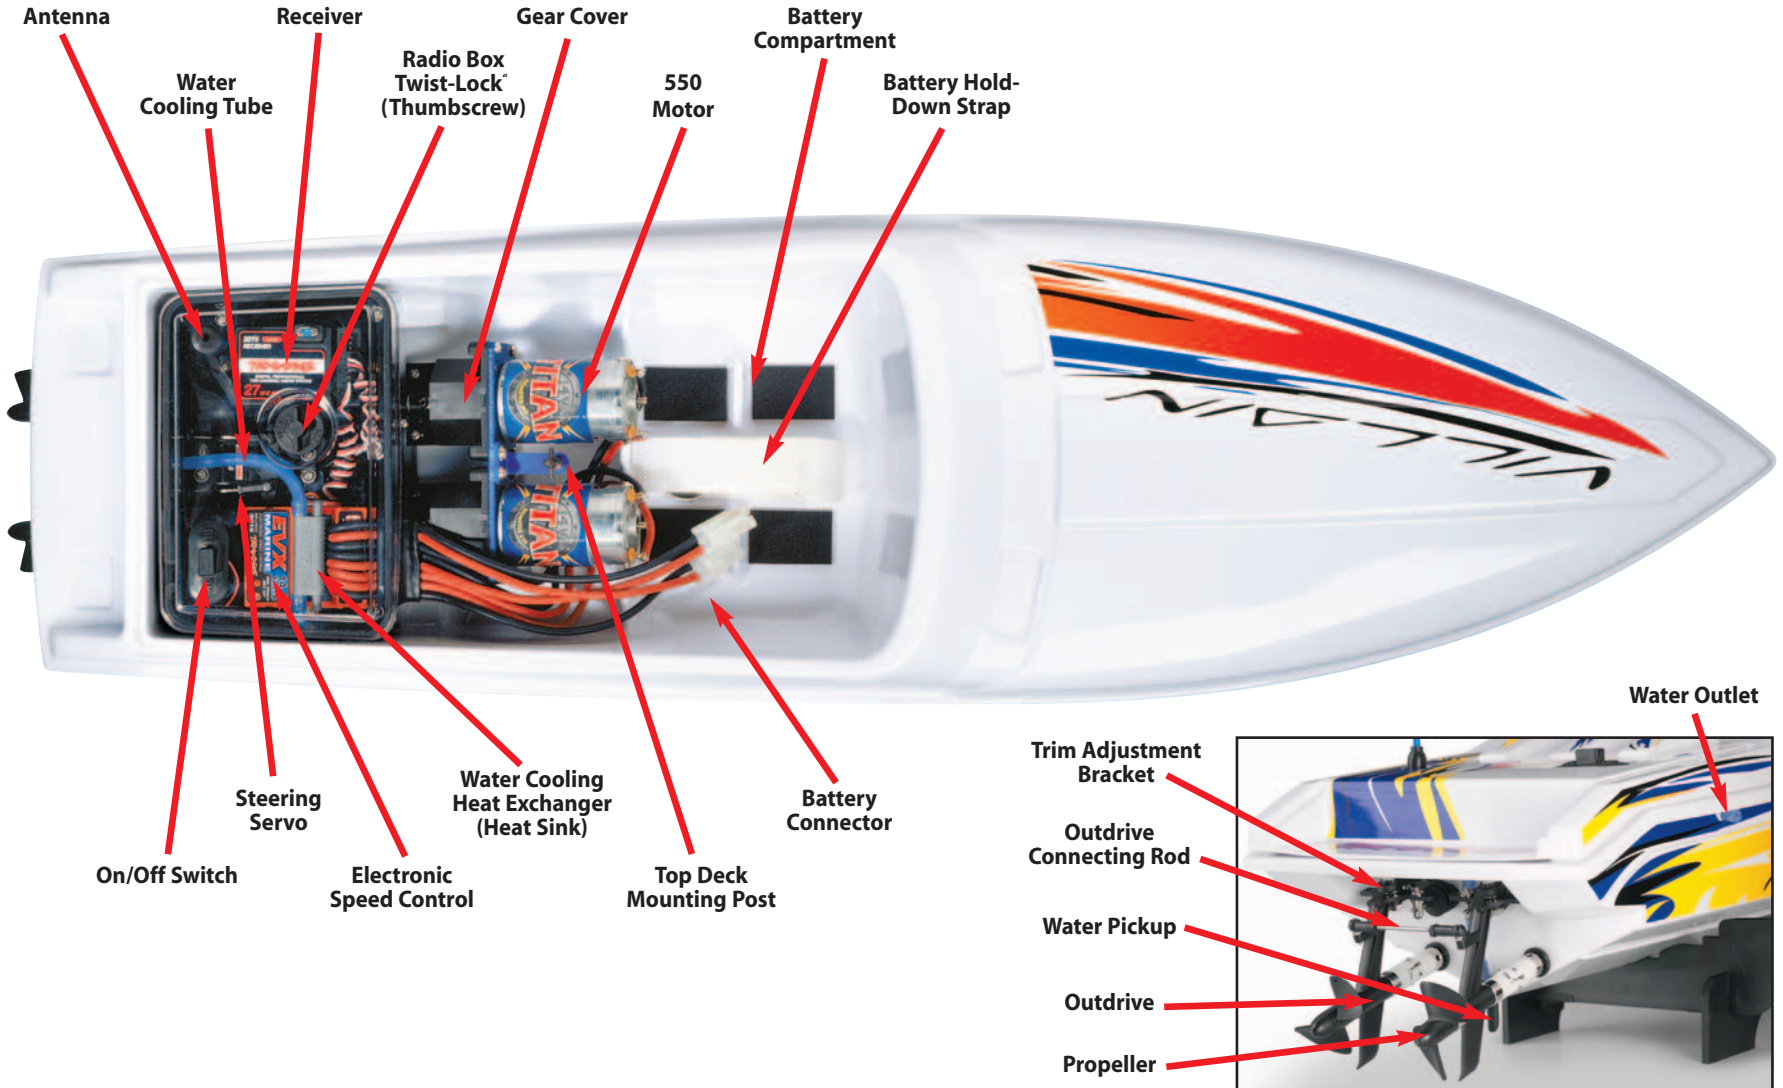

Quick Start: Getting up to Speed



The following guide is an overview of the procedures for getting your Villain EX set up and running. Refer to the pages indicated for details on each step. Look for the Quick Start logo on the bottom corners of Quick Start pages.

- 1. Charge the battery packs • See page 11**
The Villain EX requires two fully charged 7.2-volt battery packs (not included). Charge your batteries now so they will be ready when you finish the other setup procedures.
- 2. Install the antenna • See page 12**
Install the antenna mast in the Villain EX.
- 3. Install batteries in the transmitter • See page 11**
The transmitter requires 8 AA alkaline batteries.
- 4. Install battery packs in the model • See page 11**
- 5. Turn on the radio system • See page 14**
Make a habit of turning the transmitter on first, and off last.
- 6. Check servo operation • See page 15**
Make sure the steering servo is working correctly.
- 7. Range test the radio system • See page 15**
Follow this procedure to make sure your radio system works properly at a distance and that there is no interference from outside sources.
- 8. Detail your Villain EX • See page 8**
- 9. Drive your Villain EX • See page 19**
Driving tips and adjustments for your Villain EX.
- 10. Maintaining your Villain EX • See page 21**
Follow these critical steps to maintain the performance of your Villain EX and keep it in excellent running condition.




The Quick Start Guide is not intended to

replace the full operating instructions available in this manual. Please read this entire manual for complete instructions on the proper use and maintenance of your Villain EX.


Detailing Your Villain EX

Applying the Decals


The decals are printed on self-adhesive clear mylar. To apply the decals, place one end down, hold the other end up, and gradually smooth the decal down with your finger as you go. This will prevent air bubbles. Placing both ends of the decal down and then trying to smooth it out will result in air pockets.

 To ease the application of the large decals, fill a spray bottle with a mixture of water (16 ounces) and baby shampoo (1/4 ounce). You may also use mild dish soap or glass cleaner. The mixture will act as a lubricant when positioning the decals and prevents the decal from sticking to itself.

- The decals are die cut, however for concourse quality results, they can be trimmed closer using scissors or a hobby knife.
- Wet the boat surface (with the soap solution) where the decal will be applied.
- Position the decal, following the directions below.
- Wet surface of decal to prevent scraping or tearing when removing air bubbles (remove air bubbles from beneath the decal using a soft or rubber straight edge/squeegee).
- If air bubbles are still present, gently pierce the bubble with a needle (be sure to squeegee out any soap solution from inside the bubble).
- Allow 12 hours drying time before running the boat.



For best results, apply the decals in alphanumeric order, ie: A1, A2, A3 etc.

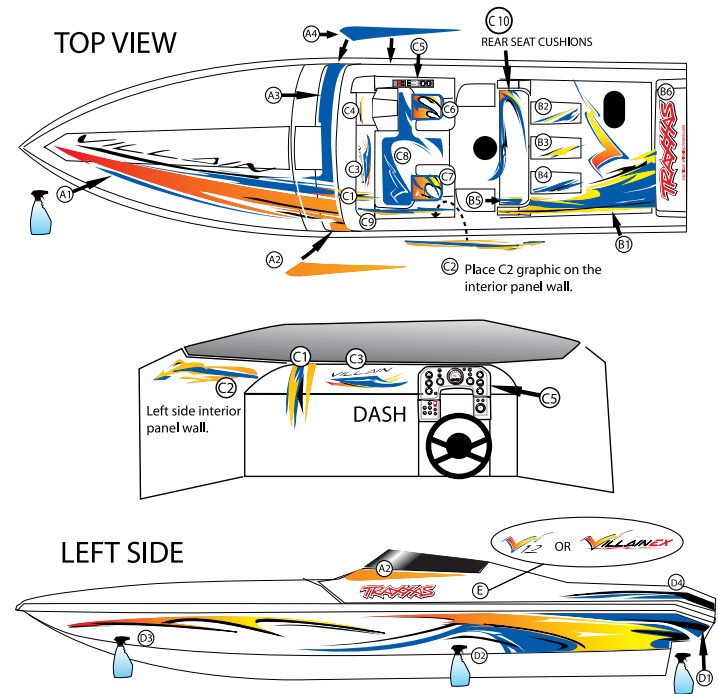


Painting the ABS Hull


If you wish to paint your hull another color other than the factory white, then choose your paint with caution. Only use enamel paint made for plastic models (available from your hobby dealer). Do not use lexan paint. Test the paint on an inconspicuous and non-critical area before painting the entire boat. Follow the manufacturer's directions for the paint. The hull will need to be thoroughly cleaned of dirt, oil and fingerprints. For the best results, use wax or grease remover. The hull may require light scuffing with a maroon ScotchBrite™ pad prior to painting. This will promote better paint adhesion. The paint on the bottom must be smooth to prevent a loss of performance.

The Traxxas TQ Radio System

Your Villain EX is equipped with the Traxxas TQ Radio System. The Traxxas TQ Radio System is a 2-channel system that provides high-power output up to a quarter mile. The Villain EX uses one servo and an electronic speed control.

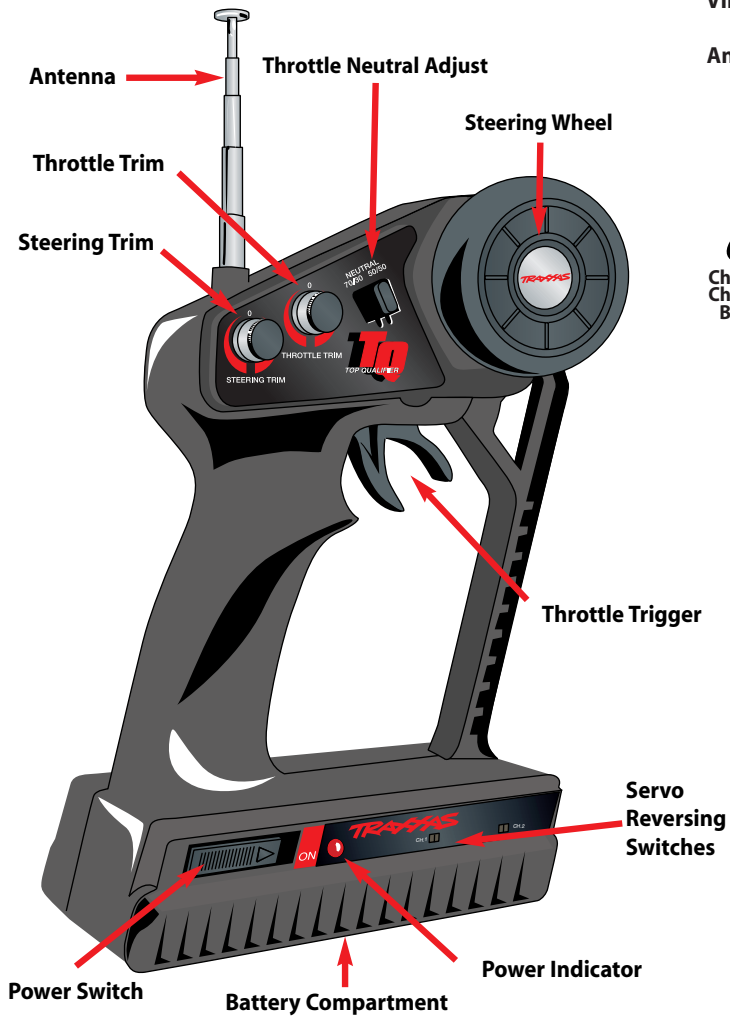

Villain EX Wiring Diagram

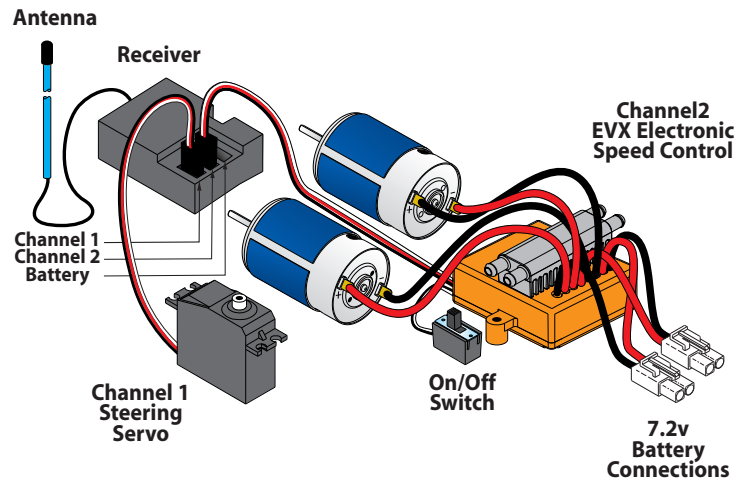

Radio System Terminology

Please take a moment to familiarize yourself with these radio-system terms. They will be used throughout this manual.

Channel - The 27 MHz frequency band is divided into 6 channels so that up to six models can be operated simultaneously. Each channel is referred to by its flag color and channel number, as shown below.

Channel	Frequency Band	Flag Color	Traxxas Part No.
1	26.995	Brown	2031
2	27.045	Red	2032
3	27.095	Orange	2033
4	27.145	Yellow	2034
5	27.195	Green	2035
6	27.255	Blue	2036

Clearing your frequency - A routine, verbal check to make sure nobody else in your area is operating on the same channel. Always clear your frequency by calling out your channel number before operating your model. Wait or move to another area if your channel is already being used.

Crystal (X-tal) - The plug-in device that determines which channel the radio system will operate on. For each channel, there are two crystals, one for the receiver and one for the transmitter. Of those two crystals, the one marked with the lower number (.455 MHz lower) must be inserted into the receiver.

ESC (Electronic Speed Control) - An electronic speed control is the electronic motor control inside the model. The Villain EX uses MOSFET power transistors to provide precise, digital proportional throttle control. Electronic speed controls use

power more efficiently than mechanical speed controls so that the batteries run longer. An electronic speed control also has circuitry that prevents loss of steering and throttle control as the batteries lose their charge.

Frequency band - The radio frequency used by the transmitter to send signals to your Villain EX. All Traxxas RTR models operate on a 27 MHz frequency band.

Neutral position - The standing position that the servos seek when the transmitter controls are at the neutral setting.

NiCad - Refers to rechargeable, nickel-cadmium batteries. The most economical choice, since they may be recharged up to 500 times.

Receiver - The radio unit inside your Villain EX that receives signals from the transmitter and relays them to the servos.

Servo - Small motor unit in your Villain EX that operate the steering mechanism.

Transmitter - The hand-held radio unit that sends throttle and steering instructions to your Villain EX.

Trim - The fine-tuning adjustment of the neutral position of the servos, made by adjusting the throttle and steering trim sliders on the face of the transmitter.

BEC (Battery Eliminator Circuit) - The BEC can either be in the receiver or in the ESC. This circuit allows the receiver and servos to be powered by the main battery pack in an electric model. This eliminates the need to carry a separate pack of 4 AA batteries to power the radio equipment.

Thermal Shutdown Protection - Temperature sensing electronics are used in the ESC to detect overloading and overheating of the transistor circuitry. If excessive temperature is detected, the unit automatically shuts down to prevent damage to the electronics.

One-Touch Setup™ - Novak Electronics trademark name for circuitry inside the EVX electronic speed control that allows it to adjust to the transmitter settings by pressing a button on the speed control and operating the transmitter controls (see page 16 for instructions).

Charging The Batteries

The Villain EX requires 8 AA batteries and two fully charged 7.2 volt NiCd or NiMH battery packs. These batteries are not included with the model. You can use either side-by-side racing style packs or the more common stick packs. The battery compartments on the Villain EX are designed to handle both. The Villain EX's run time is greatly affected by the milliamp hour (mAh) rating of the batteries. A 3000 mAh battery pack will theoretically run twice as long as a 1500 mAh pack. Follow the charger manufacturer's directions for charging and caring for your battery packs.


Any 7.2 volt battery packs (not included) must be fully charged before installing them in the boat. **Always remove the batteries from the model before charging.** For convenience, we recommend using an AC peak-detecting charger that plugs into an AC wall outlet. This type of charger uses special voltage detection circuitry that automatically shuts the charger off when the battery is fully charged.

If you are using a 15-minute timed charger, always fully discharge the battery pack before each charge. Some high-mAh (milliamp hour) battery packs (1500 mAh or higher) may require more than the standard 15 minutes of charge time. If the battery pack is cold after 15 minutes of charging, then add another 5 minutes of charge time. Closely monitor the battery pack and stop charging when it begins to feel warm to the touch. Never leave a battery charging unattended. Always follow the charger manufacturer's instructions.

Battery Installation

Installing Transmitter Batteries


1. Remove the battery compartment door by pressing the tab and lifting the door up.
2. Install 8 AA batteries in the correct orientation as indicated in the battery compartment.
3. Reinstall the battery door and snap it closed.
4. Turn on the transmitter and check the power indicator for a solid red light.

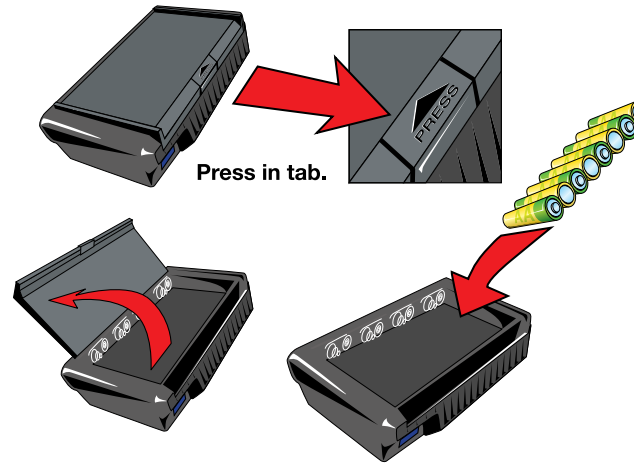

If the power indicator light flashes, then the transmitter batteries are weak, discharged or possibly installed incorrectly. Replace with new or freshly charged batteries. The power indicator light does not indicate the charge level of the 7.2 volt battery packs in the model.

Installing NiCd Batteries

The Villain EX is equipped with the EVX Marine speed control. The EVX requires two battery packs to be connected in order for it to work. The EVX uses a serial connection that combines the two 7.2 volt battery packs for a total of 14.4 volts of input. This produces higher voltage output for the Villain EX's larger 550 size motors.

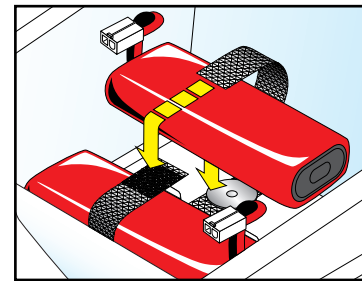

Place the battery packs into the front compartment of the boat and secure them tightly with the Velcro straps. Do not connect the battery packs yet.

Use the Right Batteries

Your transmitter uses AA batteries. Use new alkaline batteries, or rechargeable batteries such as NiCad or Ni-MH (nickel-metal hydride) batteries in your transmitter. Make sure rechargeable batteries are fully charged according to the manufacturer's instructions.

If you use rechargeable batteries in your transmitter, be aware that when they begin to lose their charge, they lose power much more quickly than regular alkaline batteries.

Caution: Discontinue running your Villain EX at the first sign of weak transmitter batteries (flashing red light) to avoid losing control.



Spray a little window cleaner on the antenna wire to make it easier to push through the antenna tube.



Don't shorten the length of the antenna wire. Its length is tuned to the frequency band; cutting it could severely shorten the radio system's range.




Don't push the transmitter antenna down from the top. Pull it down from the bottom, one segment at a time, to prevent binding and kinking the antenna mast.


Setting Up the Antenna

You must install the antenna mast (tube) before you operate your Villain EX boat. You'll find the plastic antenna tube and tip in the bag with your manuals and documentation.

1. Remove the top deck by turning the Twist-Lock™ counter-clockwise.
2. Locate the black antenna wire coiled on the outside of the radio box.
3. Straighten the antenna wire with your fingers and then insert the end of the wire into one end of the antenna tube. Push the wire all the way through the antenna tube.
4. Pull the remaining wire through the antenna tube and then insert the base of the antenna tube through the rubber seal in the radio box cover.
5. Push the base of the antenna tube into the post in the bottom of the radio box making sure that the antenna wire slides into the slot in the post (see illustration).
6. Fold the top of the antenna wire over the top of the antenna tube. Slide the antenna sleeve over the tube to retain the antenna wire. Now slide the antenna tip onto the top of the antenna tube. Never cut or shorten the antenna wire.
7. On the transmitter, always fully extend the telescoping antenna when running your boat. Make a habit of holding the transmitter so that the antenna points straight up.

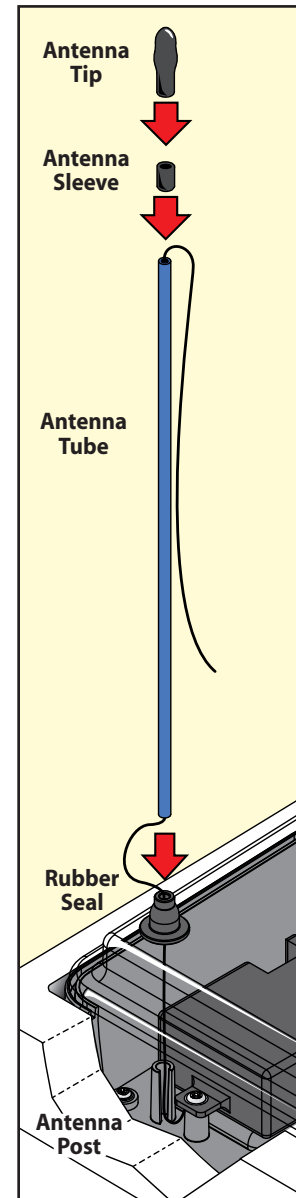

TQ Radio System Controls

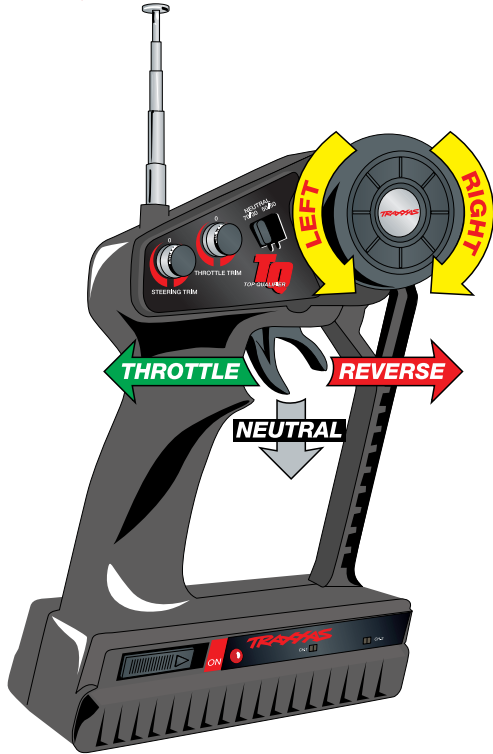


Other TQ Radio System Adjustments

In addition to the electronic throttle and steering trim controls, your radio system features throttle neutral adjustment and servo reversing switches.

Throttle Neutral Adjustment

The throttle neutral adjustment is located on the transmitter face and controls the forward/reverse travel of the throttle trigger. Change the adjustment by pressing

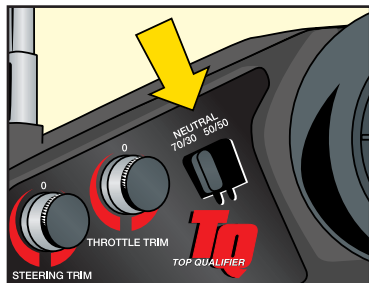

the button and sliding it to the desired position. There are two settings available:

- ▶ 50/50: Allows equal travel for both acceleration and reverse.
- ▶ 70/30: Allows more throttle travel (70%) and less reverse travel (30%). 70/30 is the required setting for the Villain EX.

Note: If you change throttle travel, you will need to reprogram the electronic speed control.

Electronic Throttle Trim

The electronic throttle trim located on the face of the transmitter adjusts the neutral (center) point of the throttle servo when the servo is at rest. Your Villain EX uses an electronic speed control instead of a throttle servo. This control has been preset for you at the factory.


Electronic Steering Trim

The electronic steering trim located on the face of the transmitter adjusts the neutral (center) point of the steering servo when the servo is at rest. Adjust this control to make the model drive straight with no steering input at the wheel.

Servo Reversing Switches

The servo reversing switches are located on the front of the transmitter, next to the on/off switch. Moving a switch reverses the direction of the corresponding servo.

Each switch corresponds to a channel, as shown below. For example, if you turn the steering wheel to the right and your outdrives turn left, you would move the channel 1 switch to correct the servo direction. It may be necessary to adjust the corresponding trim control after moving a switch.



Channel	Servo
1	Steering
2	Throttle

Default Setting


! Remember, always turn the transmitter *on first* and *off last* to avoid damage to your model.

💡 Your electronic speed control was adjusted to the radio from the factory. It is possible for the throttle trim control on the transmitter to have moved during transit or while handling the transmitter. If the motors run when the boat (esc) is switched on, then move the throttle trim control on the transmitter until the motors stop. If anything more than a slight adjustment of the throttle trim control is required, then you should readjust your speed control. Refer to the Adjustments section on pages 16.

Radio System Rules

- ▶ Each time you prepare to run your model, you must clear your frequency to be sure no one else in the area is using the same channel as you.


There are six possible channels, numbered 1 through 6. Each is represented by a color. Look at the crystal plugged into the back of your transmitter to determine which channel your boat is assigned to.

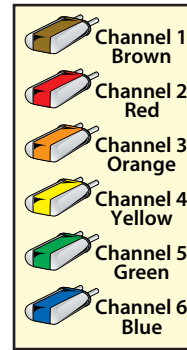

- ▶ Always turn your transmitter **on first** and **off last**. This procedure will help to prevent your Villain EX from receiving stray signals from another transmitter, or other source, and running out of control.
- ▶ Always have the transmitter turned on before you plug in the battery packs in the model. Also make sure that objects and people (fingers!) are clear of the props before connecting the batteries.

- ▶ Always use new or freshly charged batteries for the radio system. Weak batteries will limit the range of the radio signal between the receiver and the transmitter. Loss of the radio signal can cause you to lose control of your Villain EX.
- ▶ Your model came with a colored frequency flag (located in your documentation package). The color corresponds to the channel number that your model uses. Attach the flag to the end (tip) of your transmitter antenna to signal to other boaters what channel you are using.


Caution: Always be sure that objects and people (hands!) are clear of the props before connecting the batteries!

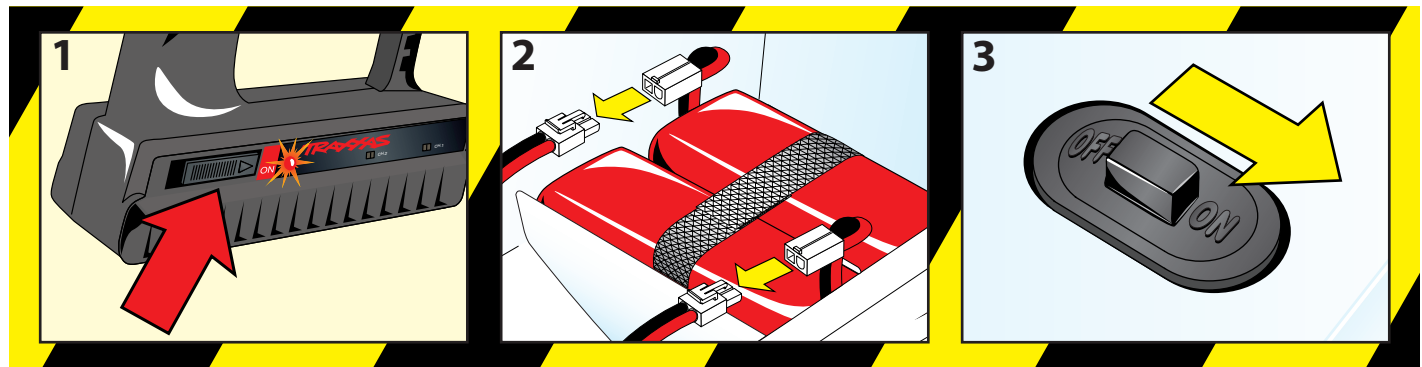

Using the Radio System

The Radio System was pre-adjusted at the factory. The adjustment should be checked, before running the model, in case of movement during shipping. Here's how:

1. Place the Villain EX on the boat stand.
2. Slide the transmitter switch to the "on" position. The red light should be on and not flashing. A flashing red light indicates weak transmitter batteries. Weak batteries will cause the range of your model to be limited and you could lose control.
3. **Keep fingers and objects away from the propeller.** Push the switch on the boat to the "on" position. The steering servo should jump and move to its idle (neutral) position.
4. Operate the steering control on the transmitter (channel 1). Check for rapid operation of the steering servo and that none of the steering mechanism is loose or binding. If the servo operates slowly, check for weak or discharged 7.2 volt battery packs. Adjust the "steering trim" control on the transmitter to adjust the servo so that the outdrives are pointing straight out from the back of the boat. Also, check to be sure that the outdrives do not turn more in one direction than in the other. If you cannot align the outdrive, refer to "Centering Your Servo" on page 21.

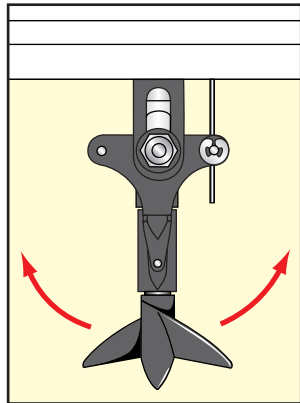

5. Operate the throttle control on the transmitter to ensure that the throttle is operating properly. If the propellers start spinning after you plug in the battery, or the boat doesn't seem to reach full speed, then refer to the directions for adjusting the electronic speed control on page 16.

Range-Testing the Radio System

Before each running session with your Villain EX, you should range-test your radio system to ensure that it operates properly.

1. Turn on the radio system and check its operation as described in the previous section.
2. Have a friend hold the model. Make sure hands and clothing are clear of the propeller and other moving parts on the Villain EX.
3. Make sure your transmitter antenna is fully extended, and then walk away from the model with the transmitter until you reach the farthest distance you plan to operate the model.
4. Operate the controls on the transmitter once again to be sure that the model responds correctly.
5. Do not attempt to operate the model if there is any problem with the radio system or any external interference with your radio signal at your location.



When rechargeable batteries begin to lose their charge, they will fade much faster than alkaline dry cells. Stop immediately at the first sign of weak transmitter batteries. Never turn the transmitter off when the battery pack is plugged in. The model could run out of control.



Don't attempt to operate your Villain EX if there are any problems with your radio system or radio interference at your location.



If the power indicator doesn't light red, check the polarity of the batteries. Check rechargeable batteries for a full charge.



If the radio system doesn't appear to work when the transmitter and model switches are turned on, check for correct battery installation.

Adjusting the Speed Control

Your Villain EX is equipped with the EVX Marine Speed Control. The electronic speed control installed in your Villain EX has been factory set and should not require any adjustments. These instructions are provided for your reference.

The EVX has three user-selectable throttle profiles:

Profile #1: 100% forward, 25% reverse: For applications where reduced speed in the reverse direction is desirable. This is the default profile for marine use.

Profile #2: 100% forward, 100% reverse: For applications where full power reverse is desirable. **Do not use this profile with the Villain EX.**

Profile #3: 100% forward, 0% reverse: This profile completely disables reverse for racing use.

Precautions


Follow these extra safety precautions for your protection and to ensure long life for the EVX speed control.

- ▶ **Disconnect the batteries.** Always disconnect the battery pack from the speed control when not in use.
- ▶ **Transmitter on first.** Turn on your transmitter before the speed control so you will have control of the radio equipment.
- ▶ **Don't get burned!** The transistor tabs and the heat exchanger can get extremely hot, so be careful not to touch them until they cool.
- ▶ **Always use the heat exchanger.** The heat exchanger is factory-installed on the speed control and must be used for maximum cooling and performance. **Do not replace with metal heat sinks!**

These additional precautions apply if the stock Villain EX is modified in the future. Please be aware that damage to the speed control caused by modification of the Villain EX or EVX will not be covered by the warranty. This includes changing the connectors.

- ▶ **Use stock connectors.** If you decide to change the battery or motor connectors, only change one battery or motor connector at a time. This will prevent accidentally mis-wiring the speed control. If the EVX is not wired exactly as shown in the diagram, it can be damaged!

EVX Wiring Diagram - Follow this diagram exactly!
The pos(+) and neg(-) battery inputs are not reversible.

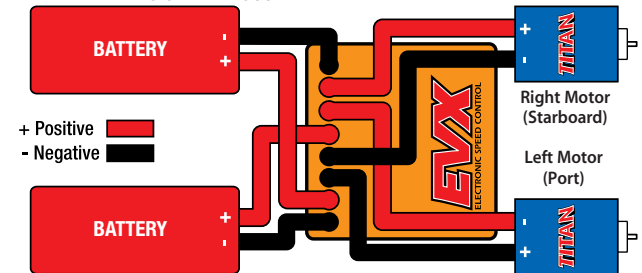

- ▶ **Use neutrally timed motors.** The motors installed in the Villain EX are neutrally timed. If you replace the motors, the motors must have 0° timing. Modified motors (with adjustable end bells) timed to 0° or Johnson/ Mabuchi (closed end bell) motors are recommended. Using motors with other than 0° timing will draw excess current in reverse, causing the speed control to overheat and premature motor wear.
- ▶ **Motor capacitors required!** If the factory installed stock motors are replaced, three 0.1µF (50V) ceramic capacitors should be properly installed on every motor to prevent radio interference. These capacitors are available from your hobby dealer (Novak Kit #5620).
- ▶ **No reverse voltage!** The speed control is not protected against reverse polarity voltage. If changing the battery and/or motor, be sure to install the same type of connectors to avoid damage to the speed control. Removing the battery connectors on the speed control or using the same-gender connectors on the speed control will void the product's warranty.
- ▶ **Don't let the transistor tabs touch!** Never allow the three separate transistor banks to touch each other or any exposed metal. This will create a short circuit and damage the speed control.
- ▶ **Insulate the wires.** Always insulate exposed wiring with heat shrink tubing to prevent short circuits.
- ▶ **Don't use electrically conductive heat sink compound on the heat exchanger.** The transistor tabs must remain electrically isolated.

Transmitter Adjustments for the EVX (Marine)

Before attempting to program your EVX, it is important to make sure that your transmitter is properly adjusted (set back to the factory defaults). Otherwise, you may not get the best performance from your speed control.


The transmitter should be adjusted as follows:

1. Set the Throttle Neutral switch to the 70/30 setting. This adjusts the transmitter's throttle trigger throw to 70% for throttle and 30% for brake/reverse.
2. Set the Throttle Trim to the middle "0" setting. This adjusts the neutral position of the throttle servo.
3. Set the Channel 1 Servo Reversing Switch to the left position.
4. Do not change the position of any of the servo reversing switches after programming the EVX.


Speed Control Programming

To program the speed control, it should be connected to the receiver, and the transmitter should be adjusted as described in the previous section.


1. Be sure the props are clear.
2. Connect two fully charged battery packs to the speed control. Connect one JST plug (RED & BLACK wires) to one battery pack. Connect the other JST plug to the other battery pack.
3. Turn on the transmitter.
4. Turn on the speed control.
5. With the transmitter throttle at neutral, press and hold the ESC SET button until the status LED turns solid red, and then release the button. You are now in programming mode.

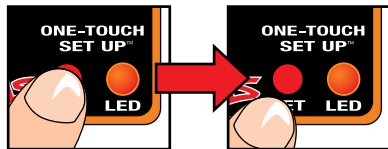


6. Pull the transmitter throttle trigger to the full throttle position. Hold it there until the status LED turns solid green. **Note:** The motors will not run during programming even if they are connected to the speed control.

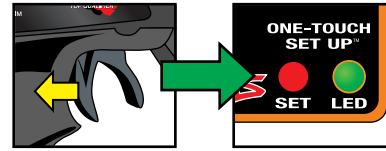

7. Push the transmitter throttle trigger to full reverse, hold it there until the status LED blinks green.

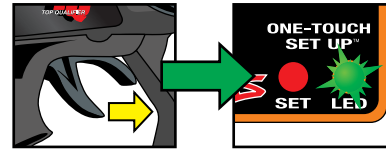

8. Release the transmitter throttle trigger allowing it to return to neutral. The status LED will turn solid red, indicating that the throttle is at neutral and the programming has been completed.

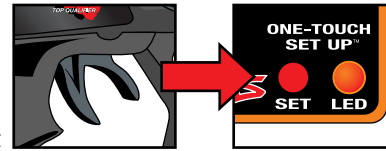

The EVX speed control is now programmed & ready to go!

- ▶ If the transmitter settings are changed, it will be necessary to complete the programming sequence again.
- ▶ If the SET button is released before the LED turns solid red in step 5, the LED will blink 7 times and then return to the normal operation mode.
- ▶ If you experience any problems during programming, turn off the speed control and repeat the programming steps.

Using an Aftermarket Transmitter with the EVX.

The following instructions are provided as reference only for those who are using an aftermarket transmitter in place of their factory Marine.


1. Set the High ATV or EPA to the maximum setting. This is the amount of servo throw at full throttle.
2. Set the Low ATV, EPA, or ATL to the maximum setting. This is the amount of servo throw at full reverse.
3. Set the Exponential to the zero setting. This adjusts the throttle channel linearity.
4. Set the Throttle Channel Trim to the middle setting. This adjusts the neutral position and increases or decreases the amount of coast braking.
5. Set the Throttle Channel Reversing Switch to either position. Do not change the switch position after programming.
6. Set the Trigger Throw Adjustment to 70% throttle and 30% brake throw.

Speed Control Throttle Profile Selection

The speed control is factory set to Profile #1 (forward with 25% reverse). To disable the reverse (Profile #3), or to allow full reverse (Profile #2), follow these steps. The speed control should be connected to the receiver and the transmitter adjusted as described on page 17.

1. Connect two fully charged battery packs to the speed control. Connect one JST plug (RED & BLACK wires) to one battery pack. Connect the other JST plug to the other battery pack.
2. Turn on the transmitter.
3. Turn on the speed control.

4. Press and hold the ESC SET button until the status LED turns from solid red to solid green. Immediately release the ESC SET button when it changes to green.

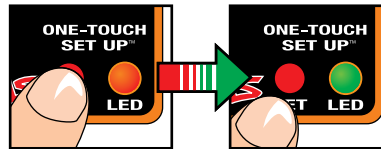


5. The LED will now flash red. The number of red flashes indicates the active throttle profile.


Profile 1 - 100% Forward / 25% Reverse	1 LED
Profile 2 - 100% Forward / 100% Reverse	2 LEDs
Profile 3 - 100% Forward / No Reverse	3 LEDs

◀ Default Marine Setting

6. Press the ESC SET button to select the throttle profile. Each press will advance the setting to the next profile. **Note:** To change the profile you must press the ESC SET button immediately after the LED flashes the current setting. Once the LED flashes the desired setting number, wait and the LED will turn green and the EVX will exit the programming mode.

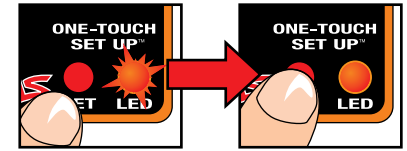

Now it's time to have some fun! This section contains instructions on driving and making adjustments to your Villain EX. Before you go on, here are some important precautions to keep in mind.

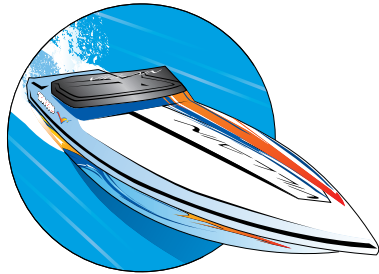

- ▶ Select a body of water, at least 10 inches deep, which is clear of moss and grass. Do not drive the Villain EX in extremely rough, choppy water or in high wind (more than 15 MPH). These conditions could cause your Villain EX to flip over.
- ▶ The Villain EX's steering is very sensitive. A slight input on the steering control will have a large effect on the boat. When the boat is out in open water, adjust the steering trim on the transmitter until the boat travels in a straight line on its own. (**Note:** The Villain EX will only travel in a straight line on its own when it is heading straight into or away from the wind. Crosswinds will require constant steering input to maintain a straight course.)
- ▶ To prevent spin outs, avoid steering sharply at high speed.
- ▶ Always be ready to reduce the throttle if the Villain EX appears to be unstable or "chine walking" (rocking violently from side-to-side). Always reduce the throttle when turning, especially in rough water. Jumping the Villain EX or towing anything with it should not be attempted.
- ▶ Return the Villain EX to shore at the first sign of weak batteries. The Villain EX will begin to slow and the controls will become sluggish.

Cavitation

If the Villain EX is running at full throttle but is only barely moving forward then the propeller is cavitating. Try advancing the throttle slowly to get the Villain EX on plane. If you are having trouble with cavitation, check the propellers for nicks or tangled debris. The Villain EX's propellers are specially designed for their application and are very sensitive to any changes or modifications. If a prop is damaged it should be replaced.

Run Time

The Villain EX is able to achieve long run times due to the greater efficiency of the high voltage electrical system. A large factor affecting run time is the type and condition of your batteries. The milliamp hour (mAh) rating of the batteries determines how large their "fuel tank" is. A 3000 mAh battery pack will theoretically run twice as long as a 1500 mAh pack. Because of the wide variation in the types of batteries that are available and the methods with which they can be charged, it's impossible for us to give you exact run times for the Villain EX. Another major factor which affects run time is how the Villain EX is driven. Our experience has shown that the run times are shorter when the boat is driven continuously at top speed.

Tips for Increasing Run Time

- ▶ Use batteries with the highest mAh rating you can purchase.
- ▶ Use a high-quality peak-detecting charger.
- ▶ Discharge the batteries completely after each run.
- ▶ Vary your speed. Continuous high speed shortens the run time on the Villain EX.
- ▶ Maintain your Villain EX. Do not allow debris or damaged parts to cause binding in the drivetrain. Keep the motors clean and the motor bushings lightly lubricated.
- ▶ Apply the throttle smoothly. Hard acceleration, especially from a stop, will shorten your run time.

Boat Retrieval

If the Villain EX accidentally flips over and fills with water, it is equipped with foam flotation to help prevent it from sinking. Traxxas does not recommend swimming or wading to retrieve a boat. If you have chosen your launch sight carefully (downwind), the Villain EX will probably drift back to you on its own.

If there is no wind, you will need a tennis ball and a length of string. Tie the tennis ball securely to one end of the string and then throw the ball over the drifting boat. Pull the ball in and try to entangle the boat in the string. Pull the boat back slowly to shore. If only the bow of the boat remains visible, try using a fishing lure with many hooks and a fishing pole. Try to snag the lip of the upper deck or drive mechanism with the hooks.



Caution! If the Villain EX suddenly stops running or runs very slowly, release the throttle immediately! There could be trash wound around the props (such as a plastic bag or fishing line). If you continue to drive the Villain EX with bound props, the high load could create excessive heat and seriously damage the batteries, speed control, or motors. Retrieve your Villain through other means (see *Boat Retrieval on the left*).





Allow the motors to cool for 15 minutes between runs. This will extend the life of the motors.

Adjusting Your Villain EX

Adjusting the Trim Angle

The outdrive struts on the Villain EX will allow you to adjust the trim angle of the propeller. The trim angle changes how high the bow of the boat rides out of the water. Setting the trim angle correctly will provide the maximum speed and efficiency from the Villain EX. As the outdrive is trimmed up, the bow (front) of the boat will ride higher. The Villain EX will run slightly faster however, it will be more unstable in the wind. Do not trim the outdrive up on windy days or when running in choppy

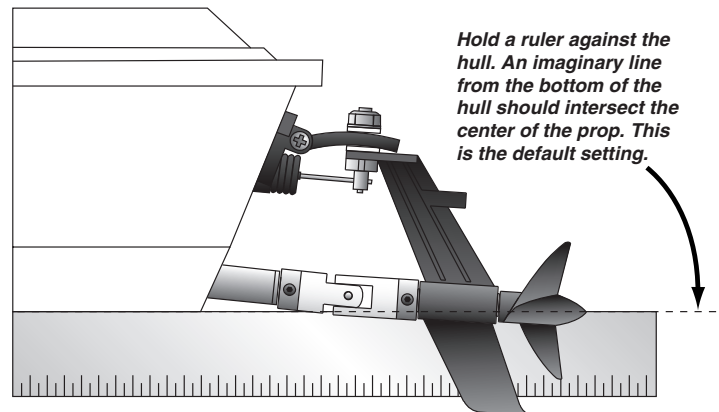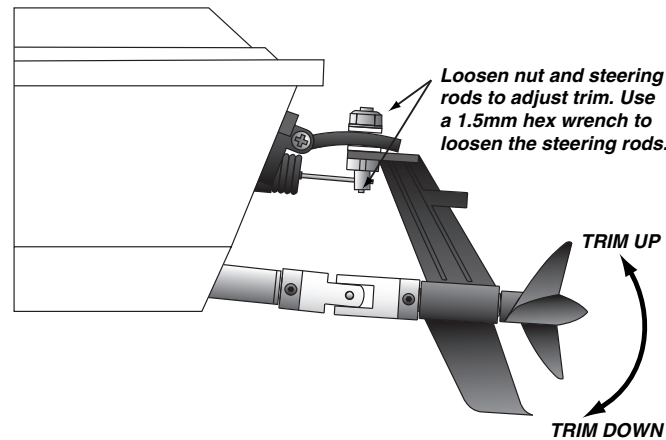


water. If the trim is set to high, then the bow will bounce up and down (“porpoise”), and the prop may begin to cavitate.

As the outdrive is trimmed down, the bow of the boat is lowered thus increasing the wetted surface of the boat. This will slow the Villain EX slightly but, stability and control will be improved. Experiment with this adjustment to find out what works best for your particular conditions. Make sure the trim angle on both outdrives is set the same.

Adjusting the Outdrive Shaft End Play

There should be a slight amount of shaft end play in each outdrive housing. To adjust the end play loosen the grub screw on the u-joint yoke (see drawing). Pull the propeller shaft until there is no more than 1mm of distance at arrow 2 in the drawing. Retighten the grub screw. This setting would not normally require adjustments unless repairs have been made, or the props have been replaced with aftermarket props.

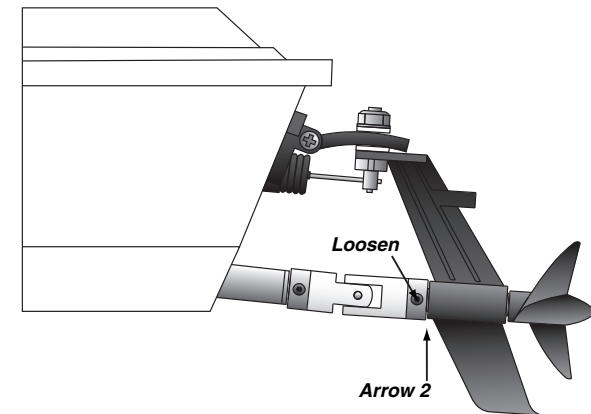

Maintaining and Storing Your Villain EX

Your Villain EX requires timely maintenance in order to stay in top running condition. The following procedures should be taken very seriously. Form the habit of visually inspecting the mechanical integrity of the Villain EX before and after each run.

Inspect the model for obvious damage or wear:

- ▶ Normally, some water will accumulate inside the boat. Empty any standing water out of the boat between runs. Pour any water out the side or front of the boat. Do not drain the water out of the back of the boat (near the radio system).
- ▶ Check the wiring for any frayed wires or loose connections.
- ▶ Check the tightness of the set screws in the collars on the steering linkages, in the propellers, and in the universal joint yokes (connecting the outdrives to the driveshafts). Thread-locking compound can be applied to these screws to prevent them from loosening.
- ▶ Check the mounting of the receiver and servo.
- ▶ Check the driveshaft seals for damage. Do not attempt to run the Villain EX if these seals are damaged in any way.
- ▶ Check the tightness of the propellers. Visually inspect the props for nicks, dings, and warpage. Replace if any damage is noticed.
- ▶ Check the operation of the radio system, especially the condition of the batteries.
- ▶ Visually inspect the hull for any cracks, damage, or possible leaks.
- ▶ **Drain all water out of the Villain EX and thoroughly dry it before you store it. Store the Villain EX with the top deck removed and radio compartment cover open so that any remaining moisture will evaporate.**

Other periodic maintenance:

- ▶ Keep the Villain EX clean of accumulated dirt and oil.
- ▶ Re-oil the motor bushings before each day of running. Use an oil made for electric motors such as 3-in-1 Oil™.

- ▶ Periodically re-oil the bushings in the outdrive housings and the driveshaft tubes. There are metal oiling nipples in each drive unit to accommodate oiling the driveshaft tube bushings.
- ▶ Keep all of the screws in the drive system tight.

Storage:

- ▶ Disconnect and remove all batteries.
- ▶ Thoroughly clean and dry the Villain EX before storing it.
- ▶ Always store the Villain EX with the top deck and radio compartment cover removed. This will allow harmful moisture and condensation to evaporate.

Centering Your Servo

Whenever your radio system has been removed for service or cleaning, the steering servo must be re-centered prior to installing the radio system in the model.

1. If the radio system is already installed in the boat, disconnect the servo horn from the servo.
2. Connect the steering servo to channel 1 on your receiver and the electronic speed control to channel 2. The white wire on the servo cable is positioned towards the crystal.
3. Place fresh "AA" batteries in the transmitter and turn the power switch on.
4. Slide the throttle and steering trim adjustments to the center position.
5. **Keep fingers and objects away from the propeller.** Connect two fresh 7.2V battery packs to the electronic speed control and turn the power switch to the on position. The servo will automatically jump to its center position.
6. Turn off the power switch in the boat followed by the transmitter. The servo is now ready to be installed.
7. Be careful not to move the servo shaft when installing the linkages. Readjust the electronic speed control as described in the previous section.

Increasing Performance

While the Villain EX is a great performer out of the box, there are steps you can take to increase the speed of the boat.

- 1. Adjust the trim angle correctly.** The trim angle should be trimmed down just enough to keep the bow of the boat from porpoising (bouncing up and down) in the current water conditions. If the trim is set too low, then it pushes the bow lower and increases drag in the water (see page 20).
- 2. Maintain your boat.** Your Villain EX will be faster if it is kept clean and in good working order. Replace the props if they get nicked or damaged. Keep bushings and gears lubricated. Keep the motors clean and oiled. Make sure the drivetrain turns freely with no binding or excess friction. Maintain the batteries by completely discharging the packs after each use. This will minimize the “memory” effect of NiCd batteries.
- 3. Use the best batteries and charger you can afford.** Rechargeable batteries will lose their “punch” over time and should be replaced when their fully charged performance decreases significantly. Consider replacing worn-out sport packs and a timed charger with high-performance batteries and a good peak-detecting charger. A peak-detecting charger charges batteries to their peak voltage and then automatically shuts off. This assures perfectly charged batteries every time.
- 4. Use aftermarket metal props.** Polished and balanced metal props can significantly increase the speed and efficiency of the Villain EX. To fit aftermarket props with 3/16 inch threads, use the Traxxas accessory prop shaft (part #1529X). For the best performance, choose props that can be purchased as counter-rotating pairs, such as the Octura X447 props (available from your hobby dealer). When larger props are used, it may be necessary to use smaller pinion gears on the motors. For example, it is necessary to use 12T pinions, 32 pitch, (part #3942) with the Octura X447 props.

5. Use more-powerful aftermarket motors. *Note: Do this at your own risk! Changing the motors will void the warranty for the EVX speed control. Damage to the EVX caused by excessive current flow is not covered by warranty. Changing the motors is only recommended for experienced users who understand the gearing needs and the increased loads and cooling requirements placed on the electronics.* The Titan 550 motors are matched to the EVX speed control to provide the best balance of performance, efficiency, and run time. Higher performance, zero-timed 550 or 540 motors may be used, however efficiency and run time will decrease (sometimes by more than half!). Aftermarket performance motors will run much hotter and often require their own water-cooling system to survive. 540 motors are not designed to operate at the Villain EX's higher voltage so they are less efficient and generate much more heat. The stock gear ratio will need to be modified by changing the pinion gears on the motors. Adjust the gearing to control current draw, run-time, and destructive heat build-up. **Improper gearing can destroy motors, batteries, and electronics very quickly.** Always start with small pinion gears (12-tooth) and closely monitor the motor and battery temperature, and run time. Pinion gear size may be increased until any one of the motors, batteries, or speed control become too hot, or the run time becomes unacceptably short. Both banks on the EVX water-cooled heat exchanger may need to be utilized for extra cooling. There are practical limits to what the electronics system in the Villain EX is capable of. For example, it may not be possible to use the fastest 10-turn modified 540 motors and the largest aftermarket props without generating so much current draw and heat that expensive batteries and electronics will be immediately destroyed. Be reasonable and conservative with your motor, gearing and prop choices to avoid expensive damage.

Index

- Antenna (receiver) 6, 9, 12
- Antenna (transmitter) 9, 12
 - sleeve* 12
 - tip* 12
 - tube* 12
 - wire* 12
- Batteries 5, 10, 11, 22
 - alkaline* 11, 15
 - charging* 11
 - compartment* 6
 - connector* 6
 - hold-down strap* 6
 - installation* 11
 - mAh* 19
 - Ni-MH (nickel-metal hydride)* 11
 - NiCad (nickel-cadmium)* 5, 10, 11, 15
 - rechargeable* 11
- Battery Connectors 9
- Battery Eliminator Circuit (BEC) 10
- Boat Retrieval 19
- Cavitation 19, 20
- Channel 9, 10, 14
- Channel number 10
- Charger 5, 22
- Clearing your frequency 10
- Crystal 10, 14
- Customer service 3
- Decals 8
- Driving 19
- E-mail 3
- Electronic Speed Control (EVX) 6, 9, 10, 14
 - adjusting* 16
 - heat sinks* 16
 - modification* 16, 22
 - precautions* 16
 - profiles* 16
 - programming* 17
 - transmitter adjustments* 17
- Flag color 10
- Frequency band 10, 12
- Gear Cover 6
- Hop Ups 22
- Heat Exchanger 6, 16
- Maintenance 21
- Motors 6, 22
- Mounting Post 6
- Neutral position 10
- On/Off switch 6, 9
- One-Touch Setup 10, 17
- Outdrive 6
 - connecting rod* 6
- Outdrive Shaft 20
 - end play* 20
- Painting 8
- Performance 22
- Power Switch 9
- Propeller 6
- Quick Start 7, 9, 12, 13, 15, 16, 20
- Radio interference 15
- Radio System 9, 15
 - adjustments* 13
 - box* 6
 - controls* 13
 - range-testing* 15
 - rules* 14
 - terminology* 10
 - terms* 10
- Range 12, 14
- Receiver 6, 9, 10
- Required equipment 5
- Run Time 19
 - increasing* 19
- Safety 4
- Salt water 4
- Servos 10
 - centering* 21
 - reversing* 9
 - steering* 6, 9
- Shipping 3
- Steering Trim 9, 10
- Steering Wheel 9
- Storage 21
- Supplies 5
- Support 3
- Thermal Shutdown Protection 10
- Throttle Neutral Adjustment 9
- Throttle Trigger 9
- Throttle Trim 9, 10, 14
- Tools 5
- Transmitter 10, 14
 - aftermarket* 17
 - power indicator* 9
- Trim Adjustment 6
 - bracket* 6
- Trim Angle 20, 22
- Twist-Lock 6, 12
- Water Cooling 6, 22
- Water Pickup 6
- Wiring diagram 9
- X-tal see also Crystal 10



Traxxas Corporation, 1100 Klein Road, Plano, Texas 75074, Phone: 972-265-8000, Toll-free 1-888-TRAXXAS
Traxxas U.K., P.O. Box 1128, Winterbourne, Bristol BS17-2SH, England, Phone: 44-117-956-1002
Internet: www.Traxxas.com, www.ReadyToRun.org